


Remote Mounted Dial Thermometer

3 1/2" Stainless Steel Case

DIAL THERMOMETERS

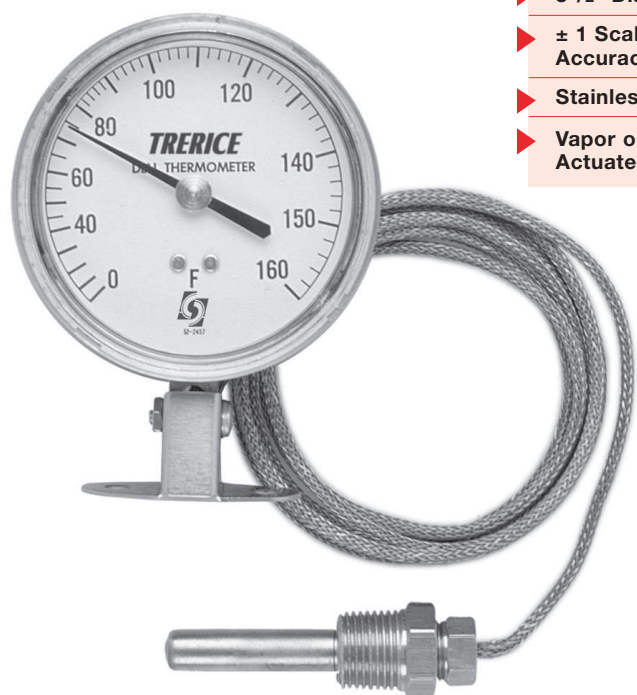

V80025 shown

The Trerice **Remote Mounted Dial Thermometer** is used extensively in the building and construction industry and is the preferred temperature instrument for OEMs worldwide. The stainless steel case is available in many styles for panel and surface mounting. This instrument has a 3 1/2" dial size and is available with either vapor or liquid actuation.






- Optional features available: Please consult the Optional Features Section for details.

Thermowell

- For applications where the process media may be corrosive or contained under pressure, the use of a thermowell is required to prevent damage to the thermometer and facilitate its removal from the process.

(Refer to page 154)

Specifications

Models	Dial Size	Case Styles
80025	3 1/2"	 Adjustable Angle , with mounting bracket
80035	3 1/2"	 Surface Mounted , back flanged, with bottom outlet
80036	3 1/2"	 Surface Mounted , back flanged with back outlet
80040	3 1/2"	 Flush Mounted , front flanged, with back outlet
80041	3 1/2"	 Flush Mounted , u-clamp with back outlet
Movement Brass		
Case Material Stainless Steel		
Window Acrylic, snap-in with Nitrile O-ring seal		
Pointer Adjustable, black finish		
Dialface Aluminum, white background with black graduations and markings		
Accuracy ±1 scale division		
Approximate Shipping Weight 1.3 lbs [0.59 kg]		

HOW TO ORDER


Sample Order Number: **V 80035 110 B01 05**

Actuation	Model	Range Code	Thermal System	Capillary Length*
V Vapor	80025	See Standard Ranges	See Thermal Selection (pages 112-113)	05 5 Feet
L Liquid	80035			10 10 Feet
	80036			15 15 Feet
	80040			20 20 Feet
	80041			


* Other Capillary lengths available: Specify in feet. Vapor: 100 Feet Max
Liquid: 20 Feet Max

All dimensions are nominal.
Dimensions in [] are in millimeters.


80025 Adjustable Angle with mounting bracket

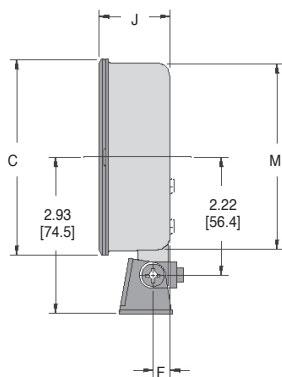


Mounting Dimensions for
80025




80035 & 80036 Surface Mounted back flanged

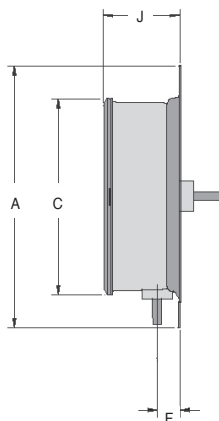

80040 Flush Mounted front flanged




80041 Flush Mounted U-clamp

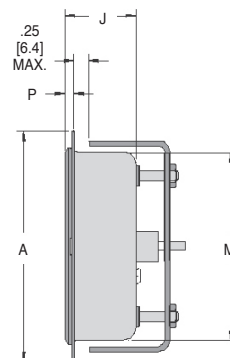

Drilling Dimensions for:

80035
80036
80040
80041

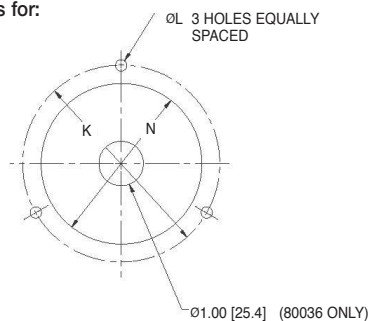

Model	A	C	F	J	K	L	M	N	P
80025	N/A	3.67 [93.2]	0.32 [8.2]	1.33 [33.9]	N/A	N/A	3.51 [89.2]	N/A	N/A
80035	4.91 [124.7]	3.67 [93.2]	0.43 [11.0]	1.44 [36.6]	4.25 [108]	0.25 [6.4]	N/A	N/A	N/A
80036	4.91 [124.7]	3.67 [93.2]	N/A	1.44 [36.6]	4.25 [108]	0.25 [6.4]	N/A	N/A	N/A
80040	4.84 [122.9]	N/A	N/A	1.33 [33.6]	4.25 [108]	0.25 [6.4]	3.51 [89.2]	3.62 [92.0]	0.17 [4.3]
80041	4.31 [109.5]	N/A	N/A	1.33 [33.8]	N/A	N/A	3.51 [89.2]	3.62 [92.0]	0.17 [4.3]

Standard Ranges (Dual Scale includes both Fahrenheit & Celsius)

Vapor Actuated				
Fahrenheit Scale Range Code	Range	Celsius Scale Range Code	Range	Dual Scale Range Code
030	-40° to 150°F	430	-40° to 65°C	230
040	-20° to 100°F	440	-30° to 40°C	240
050	0° to 100°F	450	-20° to 40°C	250
065	0° to 160°F	465	-20° to 70°C	265
100	30° to 180°F	500	0° to 85°C	300
110	30° to 240°F	510	0° to 115°C	310
120	30° to 300°F	520	0° to 150°C	320
145	100° to 350°F	545	40° to 180°C	345
160	200° to 450°F	560	90° to 230°C	360

Liquid Actuated				
Fahrenheit Scale Range Code	Range	Celsius Scale Range Code	Range	Dual Scale Range Code
020	-40° to 120°F	420	-40° to 50°C	220
050	0° to 100°F	450	-20° to 40°C	250
060	0° to 160°F	460	-20° to 70°C	260
100	30° to 180°F	495	0° to 80°C	300
110	30° to 240°F	510	0° to 115°C	310
130	50° to 300°F	530	10° to 150°C	330