


872 Series

Pressure Snubbers






872 Series Pressure Snubbers are designed to improve readability and prevent wear on delicate gauge mechanisms by slowing rapid pressure changes and reducing shock and chattering. A pressure snubber should be installed on a gauge in any application where pressure spikes and/or pulsations may be present. If a single snubber does not correct the oscillation, it is recommended to place an additional snubber in line with the first. Trerice Pressure Snubbers reduce the pulsation by forcing the pressure medium through a porous metal core and are constructed from lead-free brass (PBF) or 303 stainless steel for use on a variety of pressure media.


872 Series Pressure Snubbers

| Item No. | Body & Insert Material | Connection Size (NPT) | Maximum Pressure (psig) | Service | Approximate Shipping Weight |
|----------|------------------------|-----------------------|-------------------------|---------------------------------------|-----------------------------|
| 872-1 | Lead-Free Brass (PBF) | 1/4 | 1000 | Air and gases | 0.1 lbs [0.05 kg] |
| 872-2 | Lead-Free Brass (PBF) | 1/4 | 1000 | Water, steam, gasoline and light oils | 0.1 lbs [0.05 kg] |
| 872-3 | Lead-Free Brass (PBF) | 1/4 | 1000 | Lubricating and heavy oils | 0.1 lbs [0.05 kg] |
| 872-4 | 303SS | 1/4 | 2000 | Air and gases | 0.3 lbs [0.14 kg] |
| 872-5 | 303SS | 1/4 | 2000 | Water, steam, gasoline and light oils | 0.3 lbs [0.14 kg] |
| 872-6 | 303SS | 1/4 | 2000 | Lubricating and heavy oils | 0.3 lbs [0.14 kg] |
| 872-7 | Lead-Free Brass (PBF) | 1/2 | 5000 | Air and gases | 0.1 lbs [0.05 kg] |
| 872-8 | Lead-Free Brass (PBF) | 1/2 | 5000 | Water, steam, gasoline and light oils | 0.1 lbs [0.05 kg] |
| 872-9 | Lead-Free Brass (PBF) | 1/2 | 5000 | Lubricating and heavy oils | 0.1 lbs [0.05 kg] |
| 872-10 | 303SS | 1/2 | 10,000 | Air and gases | 0.3 lbs [0.14 kg] |
| 872-11 | 303SS | 1/2 | 10,000 | Water, steam, gasoline and light oils | 0.3 lbs [0.14 kg] |
| 872-12 | 303SS | 1/2 | 10,000 | Lubricating and heavy oils | 0.3 lbs [0.14 kg] |

All dimensions are nominal. Dimensions in [] are in millimeters.

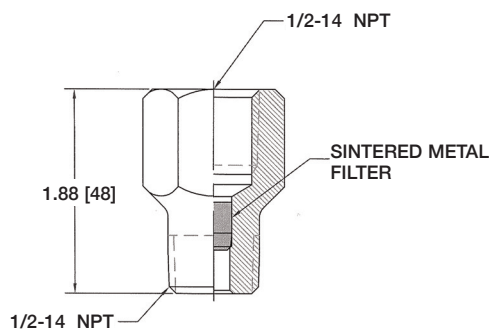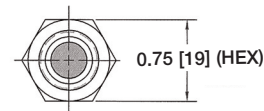

872-7 THRU 12

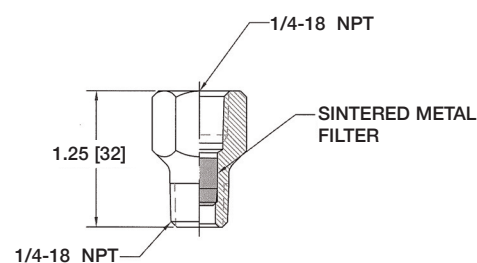

872-1 THRU 6