# **940E** Series Electric Motor Control Valve



940E-25 shown

#### Fail Open or Closed

Cast Aluminum
Construction

1/2" - 6" Valve Sizes

The Trerice 940E Series Control Valve uses a 24 Volt power supply (AC or DC) to proportionally stroke the valve via an electric motor drive actuator. The actuator will drive the valve stem up or down (to open or close the valve) in relation to a factory set 2-10 Vdc input signal (field switchable to 4-20 mA) from a controller. These electric motors can be specified to "fail-open" or "fail-closed" should a loss of control signal or actuator supply power occur. Actuators are available in two sizes: "25" for standard applications and "26" which provides for increased close-off capabilities and is required for use on some larger size valves.

For optimal performance, the service conditions (medium, flow, temperature, inlet and outlet pressures) of the application must be considered when selecting a valve. Please refer to the Valve Selection Section of this catalog. Consult the Valve Selection tables for the capabilities of a particular valve/actuator assembly. Improper application may cause failure of the valve, resulting in possible personal injury or property damage.

For replacement or service parts please see Accessories and Replacement Parts in the Regulators and Control Valves section of the list price sheet.

#### **Specifications**

#### Model 940E

#### **Actuators**

25, 26

#### Construction

Aluminum Die-Cast Yoke, Plastic Housing

#### **Power Supply**

24 VAC,  $\pm$  20% 50/60 Hz, 21 VA or 24 Vdc,  $\pm$  10%, 21 VA

#### **Input Signal**

2-10 Vdc

(field switchable to 4-20 mA)

#### **Fail Position**

Stem-Out (open), Stem-In (closed)

Manual Over-ride Feature included

with all models

#### Stroke Time (no Load)

Controlled Stroke: 90 seconds Fail-Safe Stroke: 35 seconds

#### **Protection**

NEMA 2 (indoor only)

#### **Maximum Temperature**

Ambient: +32 to +122°F (0-50°C) Process Flow: See specific valve

#### Humidity

Maximum: 95% RH

#### Approximate Shipping Weight Actuator:

25: 4.5 lbs [2 kg] 26: 8.5 lbs [3.9 kg]

#### Valve Body:

see Valve Selection tables

Sample Order Number: 940E-25-J36-17

#### **HOW TO ORDER**


Model	Actuator Size	Valve Body Number	Power Supply	Fail Position
940E	25 26	Refer to pages 260-268	1 24 VAC/Vdc (universal)	<ul><li>6 Stem-Out (open)</li><li>7 Stem-In (closed)</li></ul>


- 1. **Determine** the valve size, style and material required by the application.
- 2. Consult the Valve Selection table to determine the required Valve Body.
- 3. **Refer** to the maximum close-off pressure columns to determine the Actuator Size needed to provide the close-off pressure required by your application.
- 4. Specify the Model and Actuator Size.
- 5. Specify the Valve Body Number.
- 6. Specify the Power Supply and Fail Position codes.



# 940E Series Electric Motor Control Valve

### **Actuator Size 25**

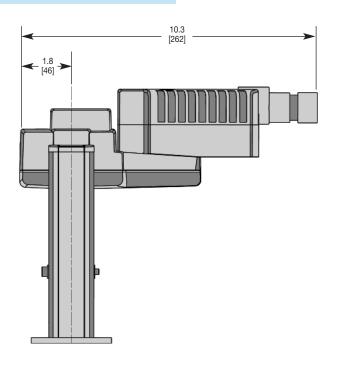

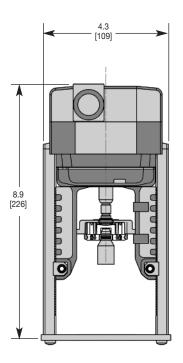

## **Actuator Size 26**

